


YEARS AHEAD

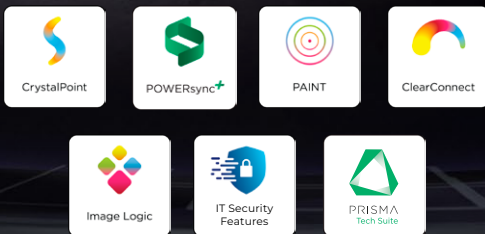

colorWAVE T60 BENEFITS

- Durable color printer**
 Businesses run better with peace of mind. The colorWAVE T-series is built for reliability and uptime, with minimal burden of daily maintenance.
- Professional design philosophy**
 We have led architects, designers, and engineers into better ways of printing technical drawings and designs for more than 85 years. We are also one of the world's leading manufacturing companies, with vast experience in design and engineering.
- Productive ease of use**
 The colorWAVE T-series provides productive ease of use for almost every task, from a quick print to complex jobs and document sets. Together with the PRISMA Tech Suite, it's color printing you can build on for the years ahead.
- Streamlined workflow**
 We are not only one of the market leaders in high-performance printers; we are also a well-known developer of controllers and workflow software that gives architects, designers, and engineers the tools they need to do the job.
- IT security features**
 More than ever, you need to protect your IT infrastructure and valuable data assets against unauthorized access. The colorWAVE T-series printers include multiple layers of security features.
- Support of your sustainable business initiatives**
 The colorWAVE T-series brings you compact, quiet, ergonomic printing. It's a color printing system that helps to support your sustainable business initiatives.
- CrystalPoint Technology**
 A unique toner gel technology that ensures a strong adhesion to a wide range of media, and sharp lines without sacrificing fine details. Experience little to no ozone emissions, no odor, no system contamination by powder or ink, and minimal waste disposal with instantly dry prints for immediate handling and stacking. The toner waste is solid and completely non-toxic, and can be disposed of as part of regular office waste.

colorWAVE T60 shown with optional Scanner Express and Operator Attention Light

colorWAVE T60

Color printing you can build on

The colorWAVE T-series combines proven technology with our latest innovations in product design and controller technology to offer you easy, highly productive color printing of technical drawings and designs with IT security features and support for your sustainable business initiatives for the years ahead.

TECHNICAL SPECIFICATIONS

STANDARD SYSTEM CONFIGURATION

2 Roll printing system

Productive large format color printer with ClearConnect multi-touch user panel

Applications

Color and B&W technical drawings, unfolded and folded maps, POP/POS posters, and Graphic Arts applications like posters, wallpapers, banners, wrapping paper

Stacking systems

Integrated Top Delivery Tray, up to 90 sheets capacity

Multi-touch user interface

ClearConnect multi-touch user interface: Consistent look and feel from every angle of your workflow, standard including Smart Inbox, SmartAccess, printer status, and Live Preview

Starter kit

4x 500g toner cartridges (Cyan, Magenta, Yellow, Black)

OPTIONAL SYSTEM CONFIGURATIONS

Roll media capacity upgrade

Additional second drawer to increase media capacity from 2 to 4 media rolls (650' per roll)

Office space saving scanning system

Scanner Express with Image Logic technology, integrated CIS scanner positioned on top of the printer to save office space

Removable hard disks

For secure environments, hard disks can be removed from the printer system to secure data integrity

Operator Attention light

For productive environments, the status of the machine is visible from a distance

TECHNOLOGY

Imaging technology

CrystalPoint Technology: The printer contains 8 Imaging Devices, 2 for each color (CMYK)
Clean toner refill system, no toner dust, no residue
Virtually no ozone emission

Automated functions

- PAINT technology (Piezo Acoustic Integrated Nozzle Technology) applies sophisticated diagnostics, maintenance, and error corrections to overcome common nozzle issues that occur with conventional inkjet printers even while printing
- Automated print language recognition
- Automated media selection
- Automatic remaining media detection, indicating remaining media per media roll
- Automated media saving function
- Automated media switch
- Automated print mode selection (Print Assistant), suggests the right print mode for your job

Toner

colorWAVE T60 TonerPearls: Cyan, Magenta, Yellow, and Black, 500g/cartridge

PRODUCTIVITY

Speed (print and copy)

Up to 4 A1/D-sizes¹ per minute
Up to 2 A0/E-sizes² per minute

B&W CAD: Up to 225 A1/D-sizes per hour, 129 A0/E-sizes per hour (high speed mode)
Color CAD: Up to 212 A1/D-sizes per hour, 120 A0/E-sizes per hour (high speed mode)

First print out time³

<40 seconds

First copy out time⁴

<40 seconds

Print modes

4 print modes
Select the print mode manually or use the Print Assistant to automatically determine the best print mode based on the content, without need for user intervention

QUALITY

Print Resolution

600 x 600 dpi

Resolution Droplet aligning accuracy

1200 dpi (corresponds to 20 microns)

Minimum line width (ISO/IEC 13660:2001E)

0.08 mm; 0.00315 in

1:1 Line accuracy

< 0.3%

SIZE AND WEIGHT

Size main engine (WxDxH)

Compact design: 82.68 x 34.45 x 63.19 in (including Top Delivery Tray)

Shipping dimensions (WxDxH)

89.4 x 47.1 x 60.1 in

Weight main engine

648 lbs (standard configuration)

Shipping weight main engine

846.5 lbs (standard configuration)

MEDIA HANDLING

Media capacity

2 or 4⁵ rolls

Media cutting

Automatic or manual

Maximum media capacity

650 ft per roll

Media sizes

Supports all roll sizes from 11 in to 42 in, including standard sizes DIN, ANSI, ARCH

Media weight

60–160 gsm; 16–43 lb; film: 2.5–8.0 mil

Media thickness

200 µm; 8 mil; film: 65–200 µm / 2.5–8 mil

Roll length

Up to 650 ft

Roll width

11 in – 42 in

Roll core diameter

3-inch and 2-inch cores (media on 2-inch core to the external output not to the Top Delivery Tray), media loose on core—cannot be taped to core

Roll diameter

Up to 7.1 in

Roll weight

Up to 40 lbs

Minimum printed length

8.5 in

Maximum printed length

650 ft

Media type

Uncoated papers, uncoated Tyvek, self-adhesive papers, self-adhesive coated vinyls, blue back papers, polypropylene films, polyester films, light block films, backlit films, soft banner, instant dry photo paper

Custom media

Custom media support, including automatic calibration, no tooling, and training required

Automatic roll media handling

- Automatic width detection
- Automatic roll media selection for optimized productivity and media saving, based on drawing size, media type, roll width, and finishing
- Automatic roll switching when end of roll is reached
- Automated media switch, to guide the media to the top delivery tray or back output depending on the user application
- Automatic Remaining media detection, indicating remaining media per media roll
- Automatic rotation and alignment for folding
- Automatic legend detection

ClearConnect USER INTERFACE

Description

ClearConnect multi-touch user panel

Size (WxHxD)

11.8 x 8.7 x 1.6 in. Touch screen: 10.4 in

Resolution

800 x 600 pixels (SVGA)

Technology

Projective capacitive touch

Operation

3 hard buttons: [Wake-up], [Stop, interrupt, abort], [Home] Multi-touch functions: tap, double tap, pinch, 2 finger pinch, swipe, flick, and spread

Interface design

Distinctive user interface with intuitive navigation and clearly defined levels of operation

Features

View optimization: tilt (-4 to +45 degrees) and turn (-45 to +180 degrees)
Status light (red, orange, green) USB 2.0 interface with indication light
Switch instantly between 2 languages, select from 20 languages: Czech, Danish, German, English, Spanish, Finnish, French, Hungarian, Italian, Japanese, Korean, Dutch, Norwegian, Polish, Portuguese, Russian, Swedish, Chinese simplified, Chinese-traditional

CONTROLLER

Description

High performance POWERSync[®] controller with Windows 10 IoT Enterprise LTSC 2021, 64 bits

Processor

6 Core, 6 Thread, Core i5-8500 @4.10GHz

Memory

2x8 GB DDR4

Video

Intel UHD Graphics 630, 1.0GHz

Hard Disk

2x 500 GB, 7200 rpm (standard)

TPM

TPM 2.0

Interface

2x Ethernet 100 Mbps/s, 1 Gbit/s
TCP/IP: DHCP, IPv4, IPv6, HTTPS
Discovery: APiPA, WS-Discovery, SNMP
WAVE interface

Page description language

TIFF, JPEG, HPGL, HPGL2, DWF, C4, Calcomp 906/907/951, CALS, NIRS/NIFF

Page description language (optional)

PDF/APPE license provides access to Adobe PostScript 3 and PDF1.7. It enables the Adobe CPSI 7.10 (Configurable PostScript Interpreter) and the APPE 5.7 (Adobe PDF Print Engine) components

Printing protocol

- LPR, FTP, WebDav
- FTP
- Pull from SMB, FTP
- Pull from cloud (retrieve from ARC Collaborate, WebDAV based clouds)
- HTTP/HTTPS (used by Publisher Express and PRISMAproduce Tech)
- Print from home folder (via access management license)

Back Channel protocol

HTTP or HTTPS

Transformations

Scaling (scale-to-fit page, reduce when image too large to avoid clipping or to custom factor, scale page size to standard size), shift (automatic or user defined), adding/removing trailing/leading edge, mirror, area to erase (area of interest)

Cloud support

Cloud support via the WebDav protocol or via solutions like uniFLOW[®]
The cloud user authentication can either be preconfigured by the administrator or done by the user at the time of accessing the specific cloud[®]

Color management

- RGB input profile (sRGB, AdobeRGB)
- CMYK input profile (Euroscale coated, Euroscale uncoated, US Web coated (SWOP), US Web uncoated, ISOcoated_v2_eci_300.icc, ISOcoated_v2_eci.icc (FOGRA39), PSO Uncoated SO12647-ECI (FOGRA47), GRACoL2006_Coated1v2.icc, SWOP2006_Coated3v2.icc, SWOP2006_Coated5v2.icc, UncoatedFogra29.icm)
- Gray profile (standard included in the PDF/APPE option)
- Rendering intent (perceptual, saturation, absolute colorimetric, relative colorimetric)

INTEGRATED SECURITY FEATURES

Safe submission	Access Control (IP filtering), IPsec, HTTPS, IP4 and IP6 compatible, password data protection
Safe storage and removal	Secure file erase, e-shredding, secure boot, data encryption with embedded FIPS 140-2 Certified Trusted Platform Module 2 (TPM), BitLocker 256 AES encryption, optional removable hard disks and optional HDD destruction at the end of the contract
Authorization	User authentication for access on the ClearConnect user panel/ WebTools Express (via LDAP/Active Directory credentials and optional via Access card), print file protection via pincode or password, possible to disable ports and interfaces, standard uniFLOW embedded applet installed on the controller; for integration in uniFLOW please contact your Canon representative
Hack prevention	IEEE 802.1x Authentication, SNMP v3, audit logging, configure HTTPS certificates TLS 1.2 strong cipher (possible to disable TLS1.0 and 1.1 protocols), possible to disable update protocols, Security Event logging, optional Trellix antivirus software, optional Trellix Application Control (whitelisting)
Secure now and in the future	Windows 10 Enterprise LTSC 2021 controller operating system. CIP (Continuous Improvement Process) including automatic Microsoft security patch update services with notifications and scheduling, continuous monitoring of vulnerabilities by Canon (https://psirt.canon.com), annual external security audit program based on the OWASP top 10 methodology (https://owasp.org), monitoring of new legislation and high impact breaches

SCANNER EXPRESS (optional)

Description	Integrated Contact Image Sensor (CIS) Color scanner with Image Logic technology
Scan resolution	600 x 600 dpi
Scan speed	Up to 10 in/sec black-and-white scanning Up to 3 in/sec color scanning
Scan formats	TIFF, PDF, PDF/A, JPEG, CALS, multi-page PDF, multi-page PDF/A, and multi-page TIFF
Scan templates	Extensive number of scan templates to standardize common scan settings and destinations
Scan protocol	FTP, SMB, scan to cloud (push to WebDAV based clouds)
Scan destination	Local USB flash drive, FTP, SMB, Smart Inbox on Controller, Optional Local Home folder (LDAP), mobile device via Publisher Express, WebDAV Clouds
Scan naming	Preset naming with auto numbering for productive scanning or file name on the ClearConnect user panel
Original width	8.2 in – 38 in, automatic width detection
Original length	8.2 in – 630 in, automatic length detection
Scan width	36 in
Original thickness	Maximum 0.8 mm; 0.03 in (non-rigid documents)
Zoom (copy)	1:1, scale to media size, scale to standard format, Custom: 10% – 1000%
Original types presets	Blueprint, colored original, dark original, folded lines/text, lines/text standard, lines/text draft, photo, map, artwork
Size scanner (WxDxH)	43 x 12 x 5.5 in
Weight scanner	55 lbs

ENVIRONMENTAL

Sound power level	Standby and sleep: 4.7 B(A) Print mode: 6.9 B(A)
Sound pressure level	Standby and sleep: 36 dB Print mode: 57 dB
Ozone concentration	Virtually no ozone emission
Heat emission	Ready: 215 W; Active: 325 W
Operating temperature	59–95 °F (recommended: 68–81 °F)
Operating humidity	20% – 80% RH (recommended: 30% – 60% RH)
Power requirements	100 – 240 V; 50/60Hz
Power consumption	Sleep mode: <2.5 W Ready mode: 202 W Active mode: 319 W
Safety/EMC & environmental certificates	CE, TÜV GS, CETECOM, c-UL-US, CB, RCM, ENERGY STAR 3.0, FEMP, EPEAT, CCC, EAC, FCC Class A, VCCI Class A, RoHS, GREENGUARD Gold
Earthquake provision ⁷	Secure the printer against moving or tilting during an earthquake; this enables the user to secure the printer to a sturdy element of the building
Recyclables	Printer: made of steel and highly recyclable plastics, min 86% of the engine can either be upcycled or recycled; remaining 14% are non-toxic waste Toner: cartridge packaging reused as maintenance cassette Prints: Deinkability certificate

WORKFLOW SOFTWARE

PRISMA Tech Suite	Create breathtaking applications while staying in control of your printer with powerful workflow solutions that are designed to help you with your day to day print operation
PRISMAproduce Tech ⁸	Compose, manage, and submit complex sets of documents from your web browser to one or more printers at a time
PRISMAlytics Dashboard ⁹	Get comprehensive overviews to monitor and maximize the production of your print operations with this secure cloud-based management information tool
PRISMAlytics Accounting ⁹	Capture data for cost charging and usage monitoring with this cloud-based reporting tool
DRIVERS, SUBMITTERS, USER PANEL	
Drivers	Easy to use printer drivers that allow you to effectively and efficiently print from any application. Create, retrieve and/or send jobs from: <ul style="list-style-type: none"> • Driver Select for Microsoft Windows • Driver Express for Adobe PostScript 3 for Microsoft Windows or Apple OS
Job submission	<ul style="list-style-type: none"> • Publisher Mobile – Submit print jobs via your mobile phone app supporting iOS and Android • Publisher Express – Easily submit your print jobs via the web independent of your web browser
ClearConnect User Panel	Print, copy, and scan is as easy as using a tablet with the multi-touch user panel: pull up a document from your Smart Inbox, USB device, or external locations; zoom and pan to different areas; even preview live while scanning or copying to avoid errors

CONTROLLER WORKFLOW

Open architecture	Integrate smoothly into print management applications such as uniFLOW thanks to our POWERSync [®] controller
Smart inbox	Personalized Smart Inbox with history, manage queue, manage history, WebTools Express, secured controller access
Queue management	Spool memory provides a queuing system for print and copy jobs. This enables multiple users to send print and copy jobs at the same time. Customize priority settings for copy and print jobs in the queue. The Job Queue overview gives access to job names, owners, and status including required media. Jobs can be paused, deleted, and placed on top of the queue.
Print management	View the counter history at preferred time periods, per job or total overview in WebTools Express. View, create, edit, and delete stamp templates. Standard uniFLOW support installed on controller, login your personal uniFLOW Queue on the ClearConnect User interface. Supports accounting, manual authentication, card readers, and contactless card readers. Scan to email and scan to cloud is supported.
Mobile and cloud	Print from and scan to the cloud application of your choice. With the help of mobile applications such as Publisher Mobile, the printer can be easily accessed and used from any location.
Device management	WebTools Express provide administrators the tools to manage the device remotely via the web: e.g., check printer status; Remote ON function, ink/toner/remaining media status; define default settings for print, copy, and scan; define access; security; accounting; remote shutdown; software update and restart; power on/off timer, system behavior; queue management; license management; and view, create, edit, and delete stamp templates, etc.

¹ D size (34 x 22 in) / A1 size (841 x 594 mm).

² E size (44 x 34 in) / A0 size (1189 x 841 mm).

³ One A1 landscape print to back output, in fastest print mode, from ready mode.

⁴ One copy made in A1 landscape. Print to back output, in fastest print mode, background compensation off, from ready mode.

⁵ Optional.

⁶ Based on current third-party support.

⁷ Excluding cable/chain and mounting material.

⁸ Client/server-based software available in September 2024.

⁹ Available in September 2024.

Canon



Adobe and Postscript are either registered trademarks or trademarks of Adobe Systems Inc. in the United States and/or other countries; Microsoft and Windows are registered trademarks of the Microsoft group of companies; Apple licensed the "iOS" trademark from Cisco. iOS is a trademark or registered trademark of Cisco in the United States and other countries and is used under license.

Canon is a registered trademark of Canon Inc. in the United States and may also be a registered trademark or trademark in other countries. uniFLOW is a registered trademark of NT-ware Systemprogrammierungs-GmbH. colorWAVE and PRISMA are a registered trademarks of Canon Production Printing Netherlands B.V. All other referenced product names and marks are trademarks of their respective owners. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Neither Canon U.S.A., Inc. nor its agents are responsible for typographical errors or omissions. Specifications and availability subject to change without notice.

©2024 Canon U.S.A., Inc. All rights reserved.

5/24-0934-11154